CAM CLEANERS – CSC



TECHNICAL FEATURES

Screening bed of steel star shaft, with cams design section for barks and other pollutant exhaust • Bearing maintenance-free and transmission system
Working speed according to chipping train • Reversible flow direction when needed.

BENEFITS

• Excellent removal of barks and other pollutant material, also snow in winter time • Low maintenance cost • Adjustable working speed.

BEST IN CLASS FOR:



WOOD BASED PANELS: PB/SPB OSB/LSB/FOSB MDF/HDF








PELLETS & ENERGY: GREEN FUELS AND BIOMASS WOOD PELLETS AND BLACK PELLETS






GLOBUS Srl - Viale G. Fauser, 3 - 28066 Galliate (NO) - Italy Ph.: +39 0321 862 702 - Fax: +39 0321 866 060 - info@globussrl.it

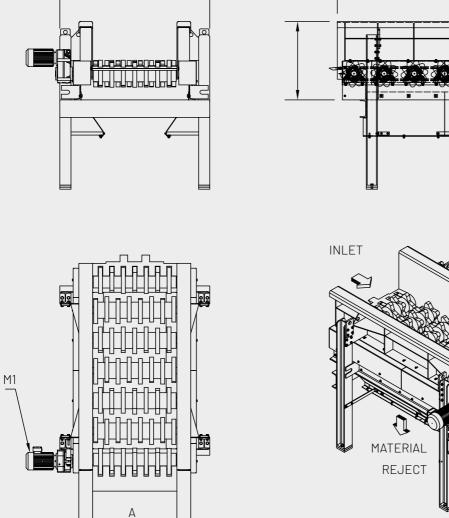

В



D

M1 = VIBRATING MOTOR

MODEL	OVERALL DIMENSIONS mm ***					
	А	В	С	D	N° rollers	
CSC **	**	**	900 ÷ 1400	2600 ÷ 6000	**	

MODEL	CAPACITY m ³ /h	POWER kW	WEIGHT
		M1	WEIGHT kg
CSC **	**	3 ÷ 18,5	**

***According to customer needs ** According to dimensions