

# DYNASCREEN

FOR WET & DRY CHIPS, SAWDUST, SHAVINGS AND PARTICLES - PATENTED




## TECHNICAL FEATURES

- Feeding conveyor for distribution across
- W-Rolls to remove very fine and dusty material
- V-Rolls to remove flakes and micro chips
- D-Rolls to remove oversize pieces
- Chrome plating or nitriding of W & V profiles
- Two side bearings and transmissions
- Devices for setting gaps easily and freely
- Single or double screening deck/s
- Discharge flap for each fraction, to be freely positioned
- Separation from 2 to 5-6 fractions
- Integrated suction unit to remove dust, fiber, paper and plastic foils, etc.
- VS system for intermediate suction
- WS system for final suction
- Devices for free setting of suction speed
- Integrated system for removal of a minor fraction highly contaminated from heavy pollutants
- Specialized shape of roll profile
- Extracting screw conveyor for the polluted fraction
- Patented.

## BENEFITS

- Zigzag channeling effect from interlocking W & V rolls: aligns the flow along the W & V gaps – improves particle vibration and screening efficiency
- W & V roll profiles: ensures better calibration of particle thickness – ensures better calibration of particle length
- VS & WS Dynasifter: easy application any time – excellent dedusting and removal of light pollutants such as fiber, paper and plastic foils, etc.
- All gaps and discharge flaps freely adjustable: enables easy changing of fraction size – enables easy variation of number of fractions
- Absolutely free from plugging and/or blockages
- Very easy setting of screening parameters
- High efficiency and reliability
- Low maintenance.

## BEST IN CLASS FOR:



WOOD BASED PANELS:  
MDF/HDF  
PB/SPB  
INSULATION BOARDS






PRESSED WOOD PACKAGING:  
PALLET BLOCKS



PELLETS & ENERGY:  
WOOD PELLETS AND  
BLACK PELLETS  
LIME



WOOD RECYCLING AND  
WASTE TREATMENT:  
WASTE

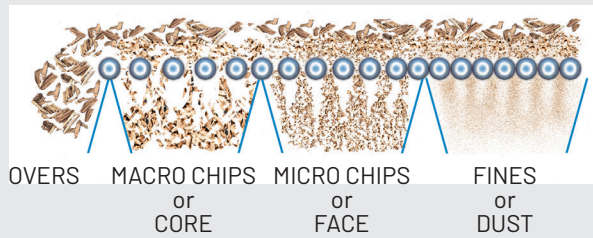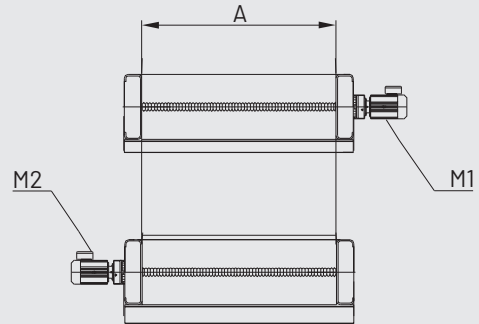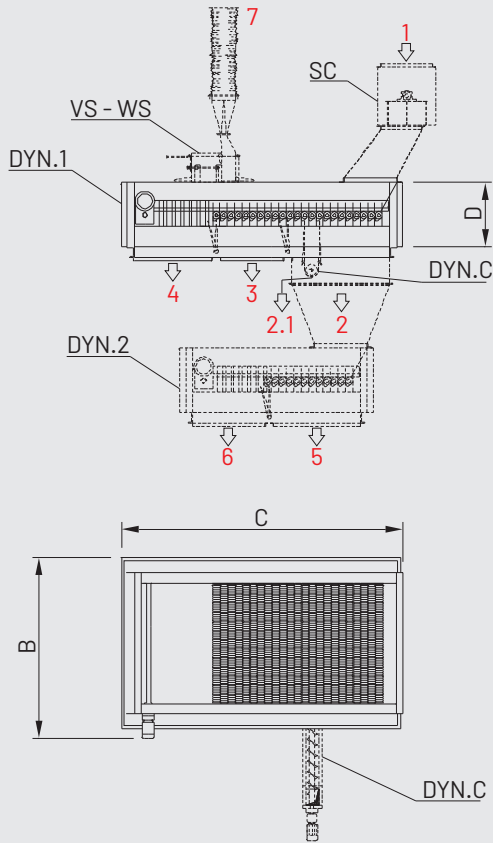

SC = DOSING SCREW CONVEYOR  
 DYN.1 = 1-DECK DYNASCREEN  
 DYN.2 = 2-DECKS DYNASCREEN

VS/WS = DYNASIFTER (OPTION)  
 DYN.C = DYNACLEANER (OPTION)  
 M1-M2 = ROLLS ROTATION

1 = FEEDING  
 2...6 = ACCEPTER FRACTIONS  
 2.1 = FRACTION WITH HEAVY POLLUTANTS  
 7 = PAPER & PLASTIC FOILS



OVERS




MACRO



MICRO



FINES



W-ROLLS



V-ROLLS



D-ROLLS

MODEL	OVERALL DIMENSIONS mm				CAPACITY m <sup>3</sup> /h	INSTALLED POWER kW	WEIGHT kg
	A	B	C	D		M1	
DYN.-1800/7000-1000	1000	2000	1800-7000	1050	According to type of material and number of rolls	3-7,5	According to number of rolls
DYN.-1800/7000-1500	1500	2500	1800-700	1050		3-7,5	
DYN.-1800/10000-2200	2200	3200	1800-10000	1050		3-7,5	