BELT CONVEYOR – NTL



TECHNICAL FEATURES

• Able to feed wood material at constant speed • Design according to wood type with reinforced impact zone, special sliding of the belt • Available in conjunction with metal detector • Ideal for wood logs, shavings, veneer waste • Special design for veneer.

BEST IN CLASS FOR:



WOOD BASED PANELS: MDF/HDF PB/SPB




PRESSED WOOD PACKAGING: PALLET BLOCKS PRESSED PALLETS



PELLETS & ENERGY: WOOD PELLETS AND BLACK PELLETS GREEN FUELS AND BIOMASS



GLOBUS Srl - Viale G. Fauser, 3 - 28066 Galliate (NO) - Italy Ph.: +39 0321862 702 - Fax: +39 0321866 060 - info@globussrl.it

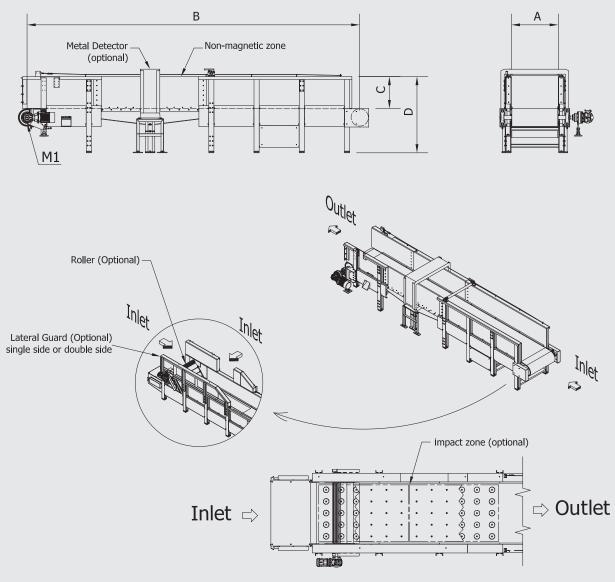

M1 = VIBRATING MOTOR

MODEL	OVERALL DIMENSIONS mm***						
	А	В		С	D		Metal Detector
NTL**	600 ÷ 1650	500 ÷ 1500		300 ÷ 1000	1700 ÷ 2600		optional
MODEL	CAPACITY m ³ /h		POWER kW			WEIGHT kg	
			M1				
NTL**	***		2.5 ÷ 22			4000 ÷ 12500	
*** A coording to oustomor poods							

***According to customer needs

**According to dimensions