

ROLLER DISCHARGE – RDG



Together with a Debarking System or alone embedded in Logs feeding line, the Roller Discharge give you the highest capacity of bark and residues evacuation out of the process line. With different designs and several association of extremely heavy duty rollers, the Roller Discharge supply high capacity and performance in cleaning. The advance design of the mechanical elements, allow an easy maintenance procedure and low energy demand ratio.


TECHNICAL FEATURES

- Several roller surface designs suitable for the different kind of wood
- Strong design to low maintenance range
- High capacity of bark and residues evacuation.

BENEFITS

- High logs transport capacity
- Low energy demand profile
- Low maintenance activity
- Designed for the different requirement of the customer.

BEST IN CLASS FOR:






WOOD BASED PANELS:

PB/SPB

OSB/LSB/FOSB

MDF/HDF

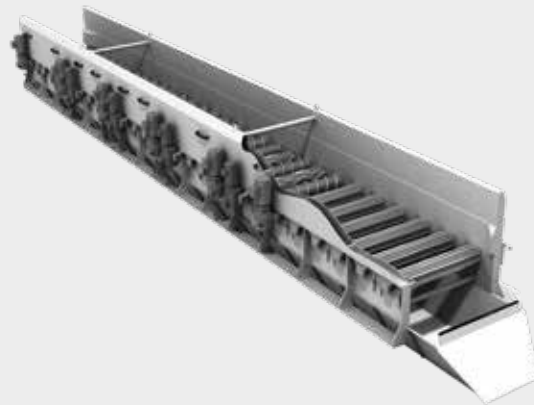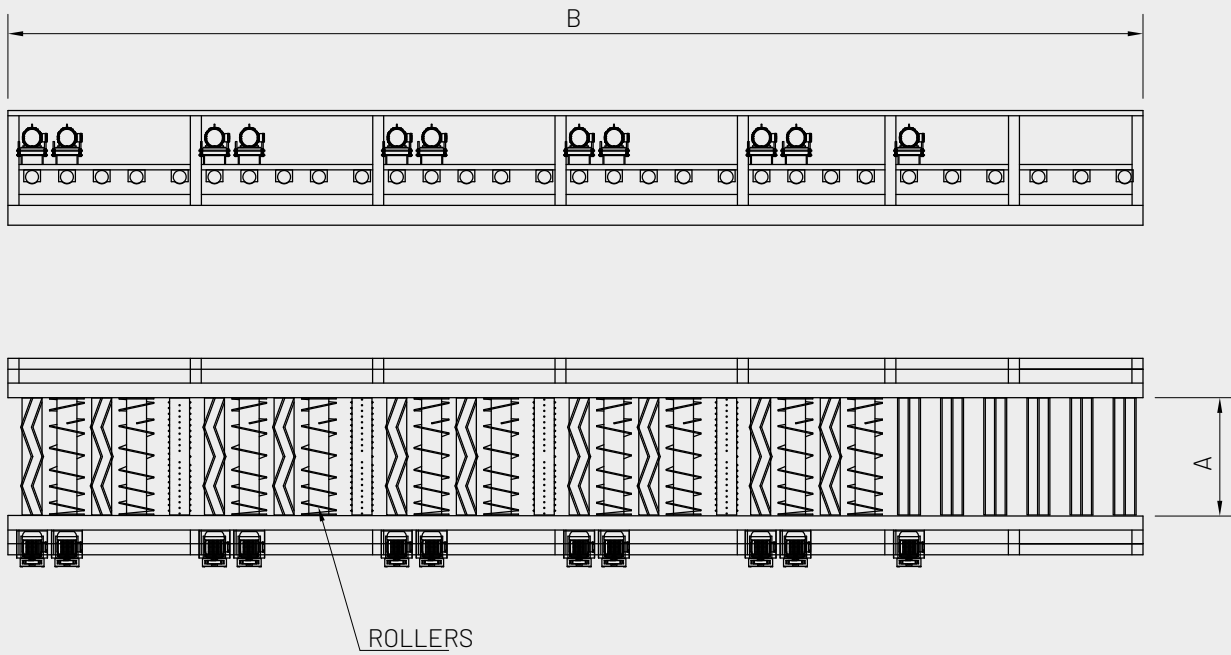

MODEL	OVERALL DIMENSIONS mm ***			
	A	B	C	N° rollers
RDG**	800 ÷ 1650	5000 ÷ 21000	800 ÷ 1600	10 ÷ 38

MODEL	CAPACITY m ³ /h Sob	POWER kW	WEIGHT Kg
RDG**	30 ÷ 400	***	5000 ÷ 20000

***According to customer needs

**According to dimensions