## KNIFE RING WASHER



BEST IN CLASS FOR:



WOOD BASED PANELS: PB/SPB OSB/LSB/FOSB




## **TECHNICAL FEATURES AND BENEFITS**

Optimized nozzle set positioned in different area to clean with high efficiency the nuts, screw and holder
Possibility to setup different cycle settings according to needs, from 5 min up to 120 min
Different side spraying angle
Complete machine prewired and pre-connected
Control panel complete with a PLC system allowing the choice of different washing cycle.



GLOBUS Srl - Viale G. Fauser, 3 - 28066 Galliate (NO) - Italy Ph.: +39 0321 862 702 - Fax: +39 0321 866 060 - info@globussrl.it

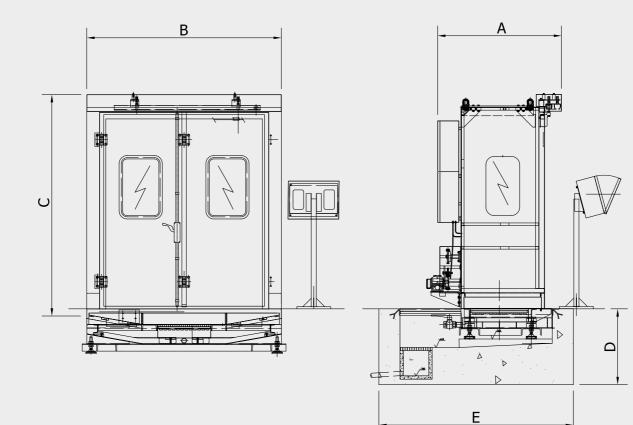

MODEL	OVERALL DIMENSIONS mm				
	А	В	С	D	E
WMG 490	1250	2300	2700	900	2300
WMG 690	1450	2300	2700	900	2300
WMG - Customized	***	***	***	***	***

TECHNICAL DATA			
CYCLE TIME	30 Min / 1 Ring		
WATER REQUIREMENTS	2400 l/h		
HIGH PRESSURE	160 bar		
TOTAL INSTALLED POWER	18 kW		

\*\*\*According to customer needs