

RECTANGULAR EXTRACTORS MOVING FLOOR




TECHNICAL FEATURES

- The extractor is carried out by means some strong bars moving on slides placed on the silo floor
- The bars are connected with some strong V-section beams able to transport the material to the discharging point
- Each bar is driven by an hydraulic cylinder
- The continue translation of the V-section beams installed on the bars permit to carry out the discharging of the material
- An hydraulic unit guarantees the coordination of the longitudinal excursion of the bars.


BENEFITS

- Wide range of extraction
- Easy modularity of the machine
- Possibility of metal structure or reinforced concrete
- Installation also overground
- Very low maintenance cost.

BEST IN CLASS FOR:




WOOD BASED PANELS:
MDF/HDF
PB/SPB
INSULATION BOARDS







PRESSED WOOD PACKAGING:
PALLET BLOCKS



PELLETS & ENERGY:
WOOD PELLETS AND
BLACK PELLETS
LIME



WOOD RECYCLING AND
WASTE TREATMENT:
WASTE

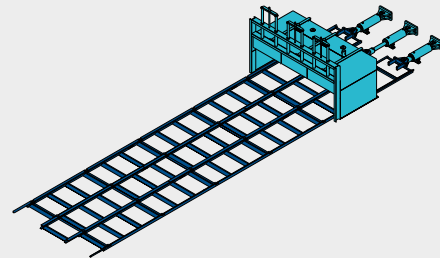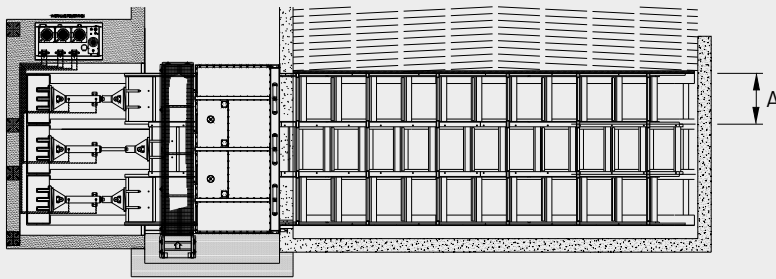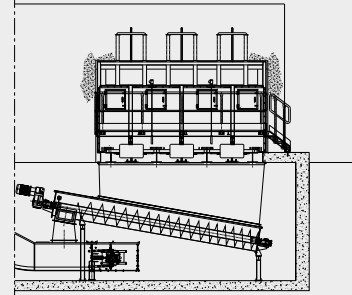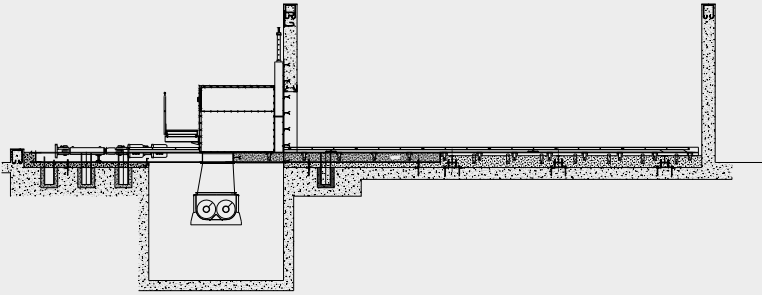

1 = FEEDING
2 = DISCHARGE

MODEL	OVERALL DIMENSIONS mm	EXTRACTION CAPACITY m ³ /h	DIMENSION	DRIVING POWER kW
	A			
MF../1500	1500	According to type of material and extraction capacity	According to storage capacity requested	Wide range available according to project customer needs