


OSCILLATING SCREENS

**SCREENS****TECHNICAL FEATURES**


- Robust and rigid supporting pyramids • High precision kinematics • Excellent elastic suspensions • High tech screening boxes assembled with high-quality materials and made with special tried and tested procedures • 1-2-4 Stage screens • 1-4 Screening decks per stage • 2-5 Fractions available • Stainless steel sieves and frames • Auto-cleaning system based on bouncing balls • Fire-extinguishing system • Explosion vents • Extensive eccentric oscillation • Perfect balancing!

**BENEFITS**

- Perfect-absolute classification of any fraction • Quick and easy replacement of the screening frames • Unbeatable performance, efficiency and reliability • 36 months mechanical warranty!

**BEST IN CLASS FOR:**


WOOD BASED PANELS:  
MDF/HDF  
PB/SPB  
OSB/LSB/FOSB





PRESSED WOOD PACKAGING:  
PALLET BLOCKS






PELLETS & ENERGY:  
WOOD PELLETS AND  
BLACK PELLETS  
LIME




WOOD RECYCLING AND  
WASTE TREATMENT:  
WASTE

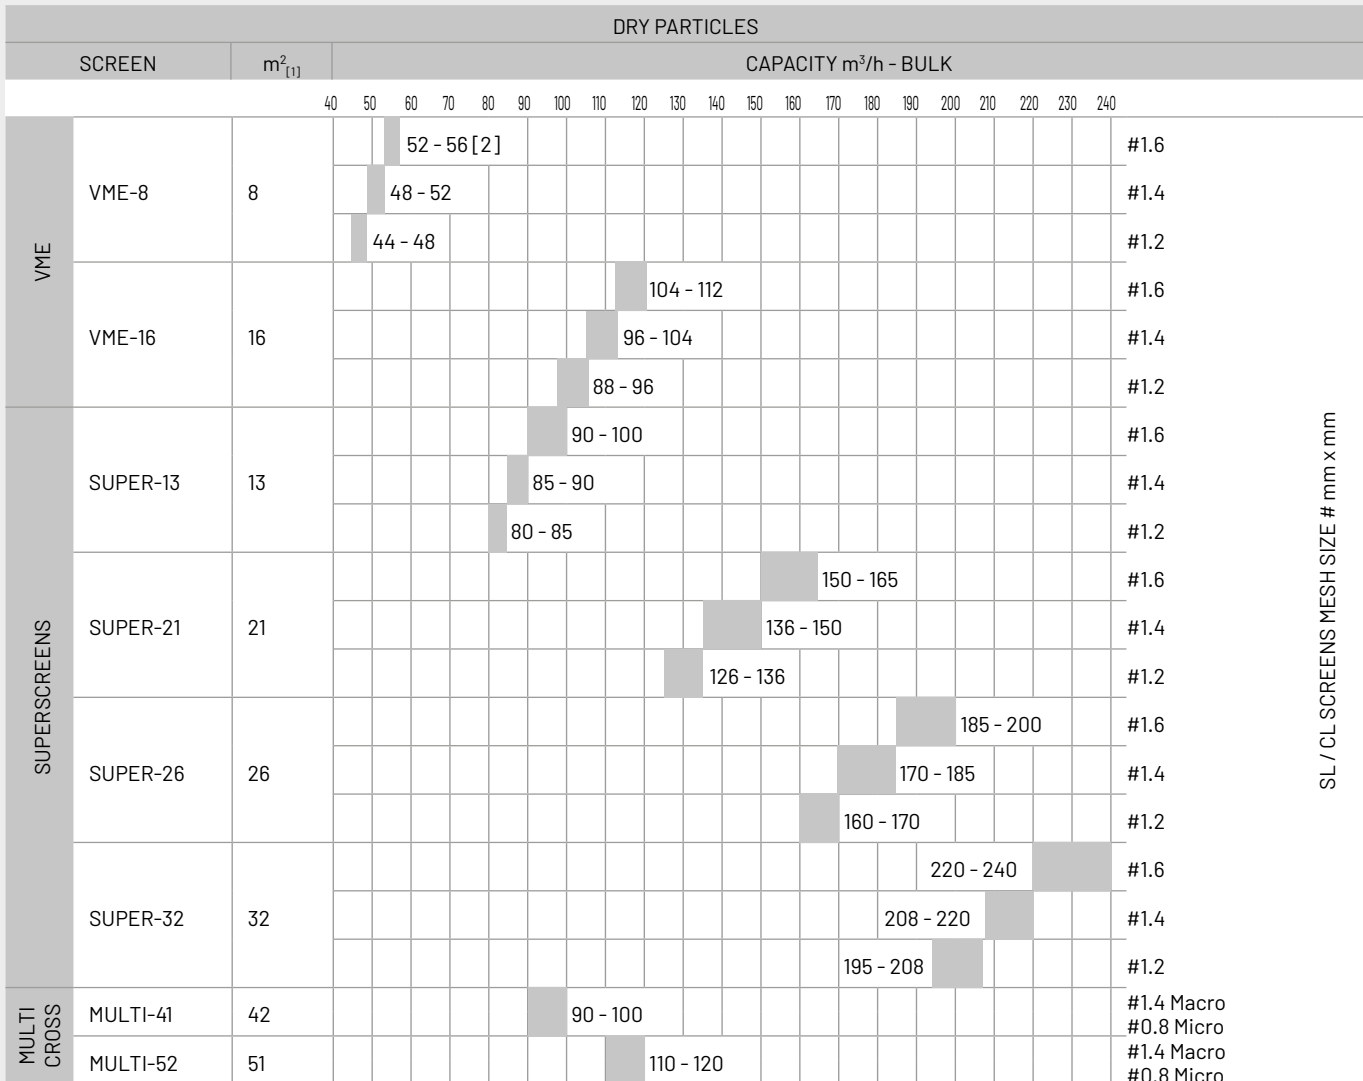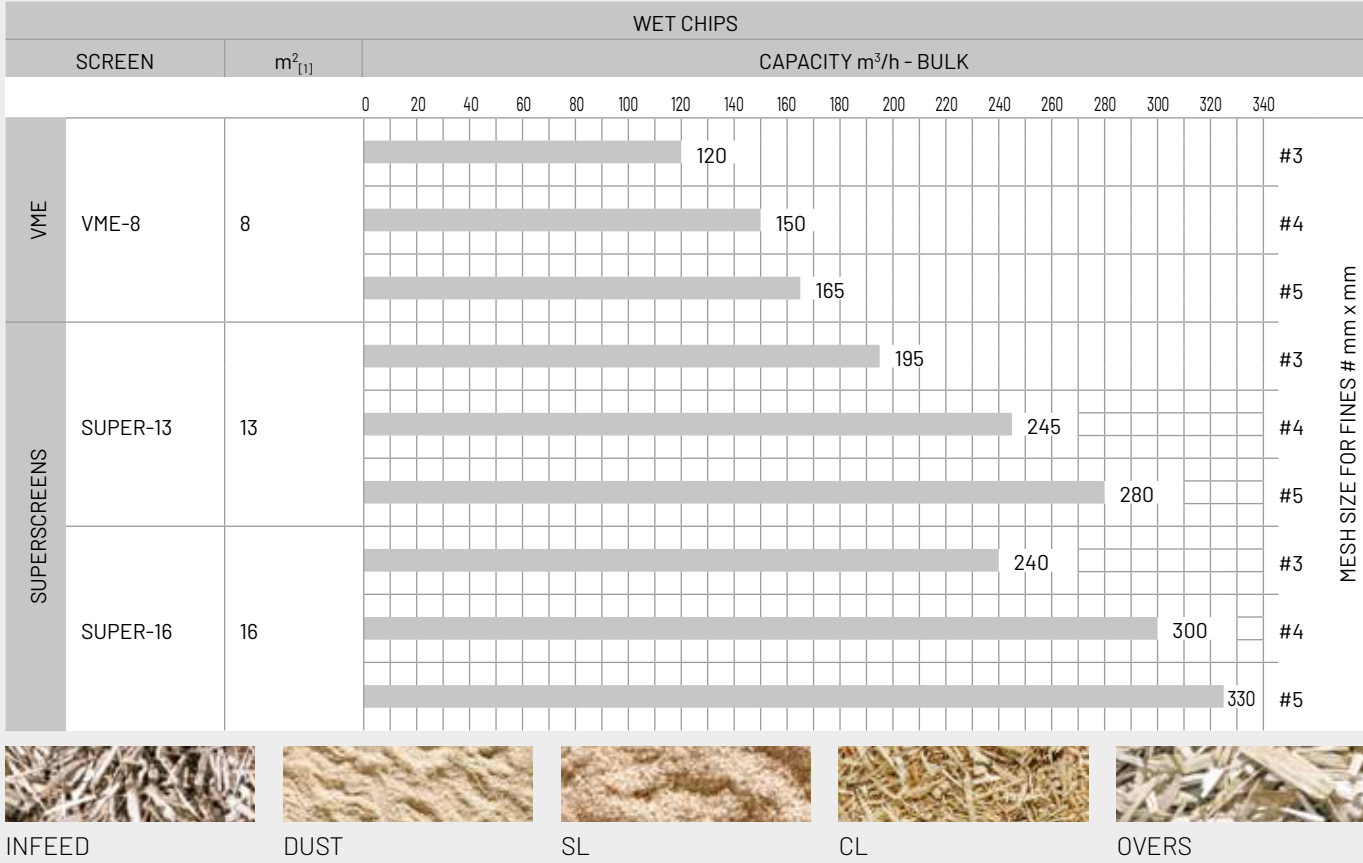

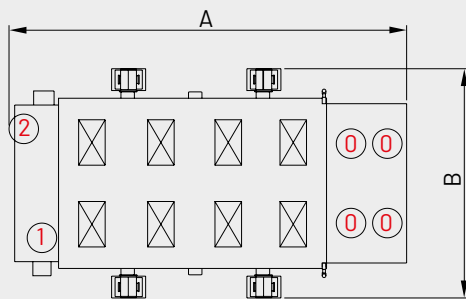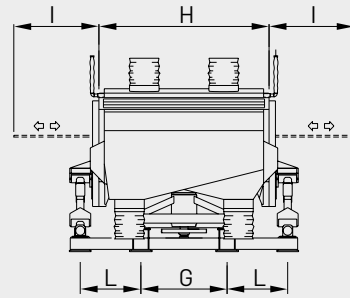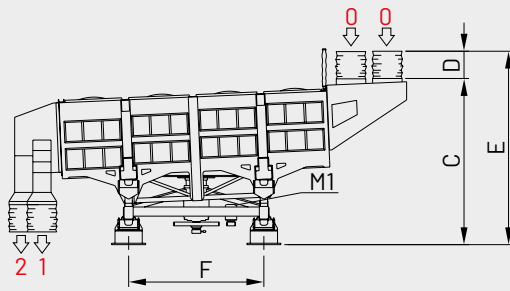

FOR DRY PARTICLES  
**1 Quadruple Deck**



2 Fractions  
 SUPERSCREEN-DP/2-1P-64-EJ-...

0 = FEEDING  
 1...2 = FRACTIONS

M1 = SCREENING  
 BOX MOVEMENT

[1] AC: Auto-cleaning ball-bouncing system for screens available for all decks  
 [2] A wide range of mesh sizes are available for any screening needs

06.01.B / 06.01.C

# SUPERSCREEN 42-52-64

4-STAGE SCREENS - 42-52-64 m<sup>2</sup> EACH QUADRUPLE DECK

MODEL	OVERALL DIMENSIONS mm										INSTALLED POWER kW	WEIGHT APPROX. kg
	A	B	C	D	E	F	G	H	I	L		
SUPERSCREEN DP/2-1P-42-EJ	8610	3860	3660	600	4360	2980	1900	2560	1250	740	11,0	15700
SUPERSCREEN DP/2-1P-52-EJ	8610	4300	3660	600	4360	2980	1900	3000	1500	960	15,0	17600
SUPERSCREEN DP/2-1P-64-EJ	8760	5050	3660	600	4360	2980	1900	3750	1875	1335	18,5	17800