


OSCILLATING SCREENS

**SCREENS****TECHNICAL FEATURES**


- Robust and rigid supporting pyramids • High precision kinematics • Excellent elastic suspensions • High tech screening boxes assembled with high-quality materials and made with special tried and tested procedures • 1-2-4 Stage screens • 1-4 Screening decks per stage • 2-5 Fractions available • Stainless steel sieves and frames • Auto-cleaning system based on bouncing balls • Fire-extinguishing system • Explosion vents • Extensive eccentric oscillation • Perfect balancing!

**BENEFITS**

- Perfect-absolute classification of any fraction • Quick and easy replacement of the screening frames • Unbeatable performance, efficiency and reliability • 36 months mechanical warranty!

**BEST IN CLASS FOR:**


WOOD BASED PANELS:  
MDF/HDF  
PB/SPB  
OSB/LSB/FOSB





PRESSED WOOD PACKAGING:  
PALLET BLOCKS






PELLETS & ENERGY:  
WOOD PELLETS AND  
BLACK PELLETS  
LIME




WOOD RECYCLING AND  
WASTE TREATMENT:  
WASTE

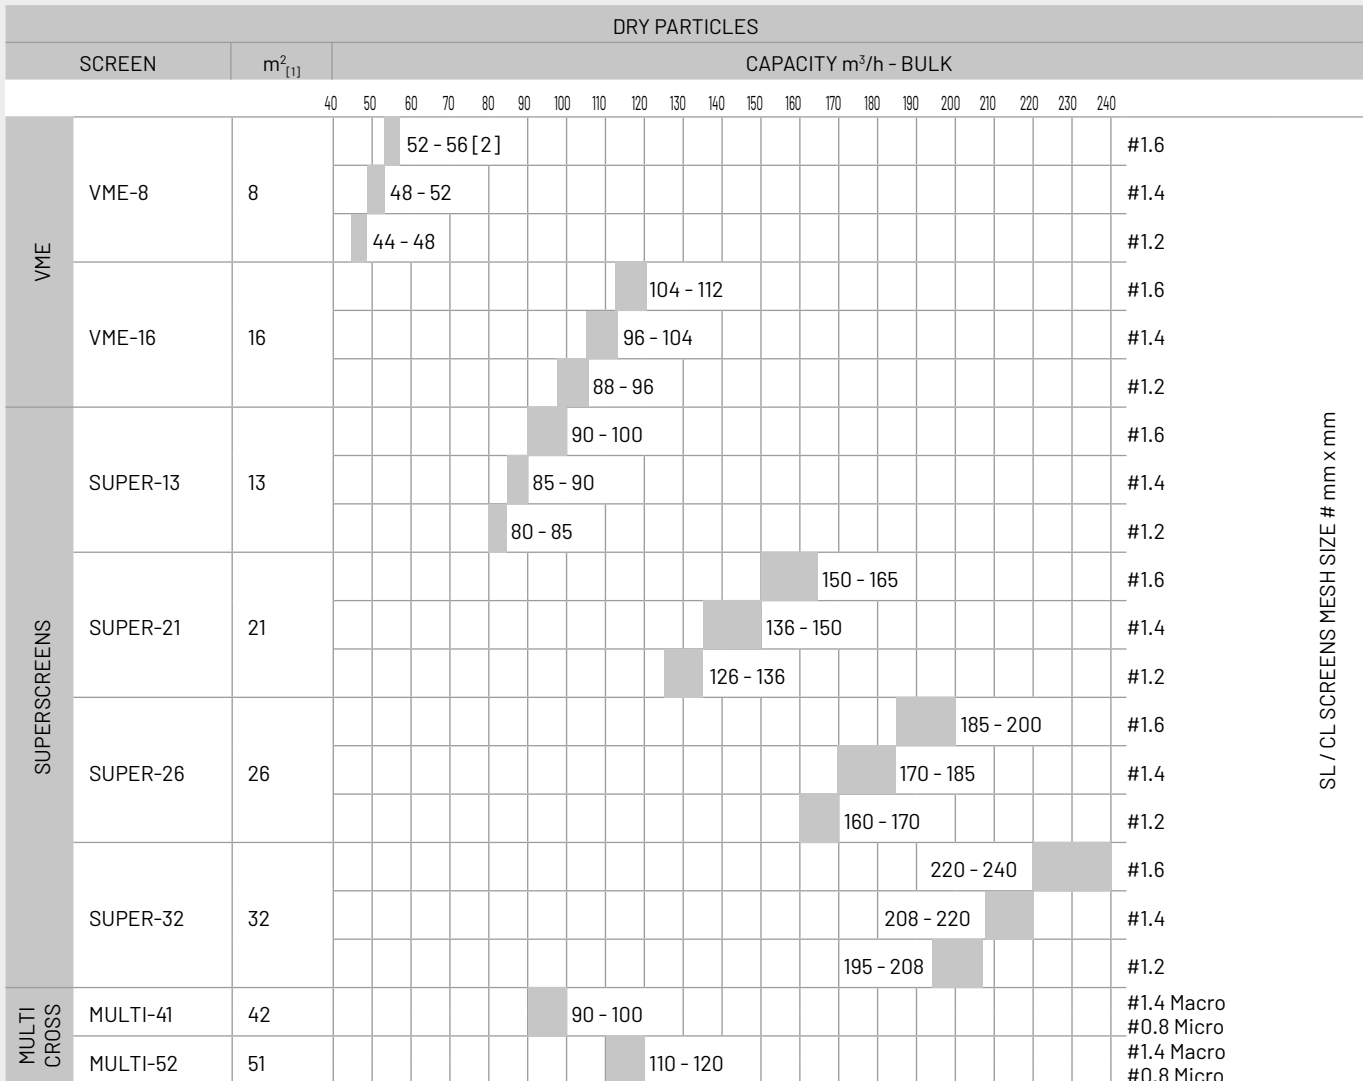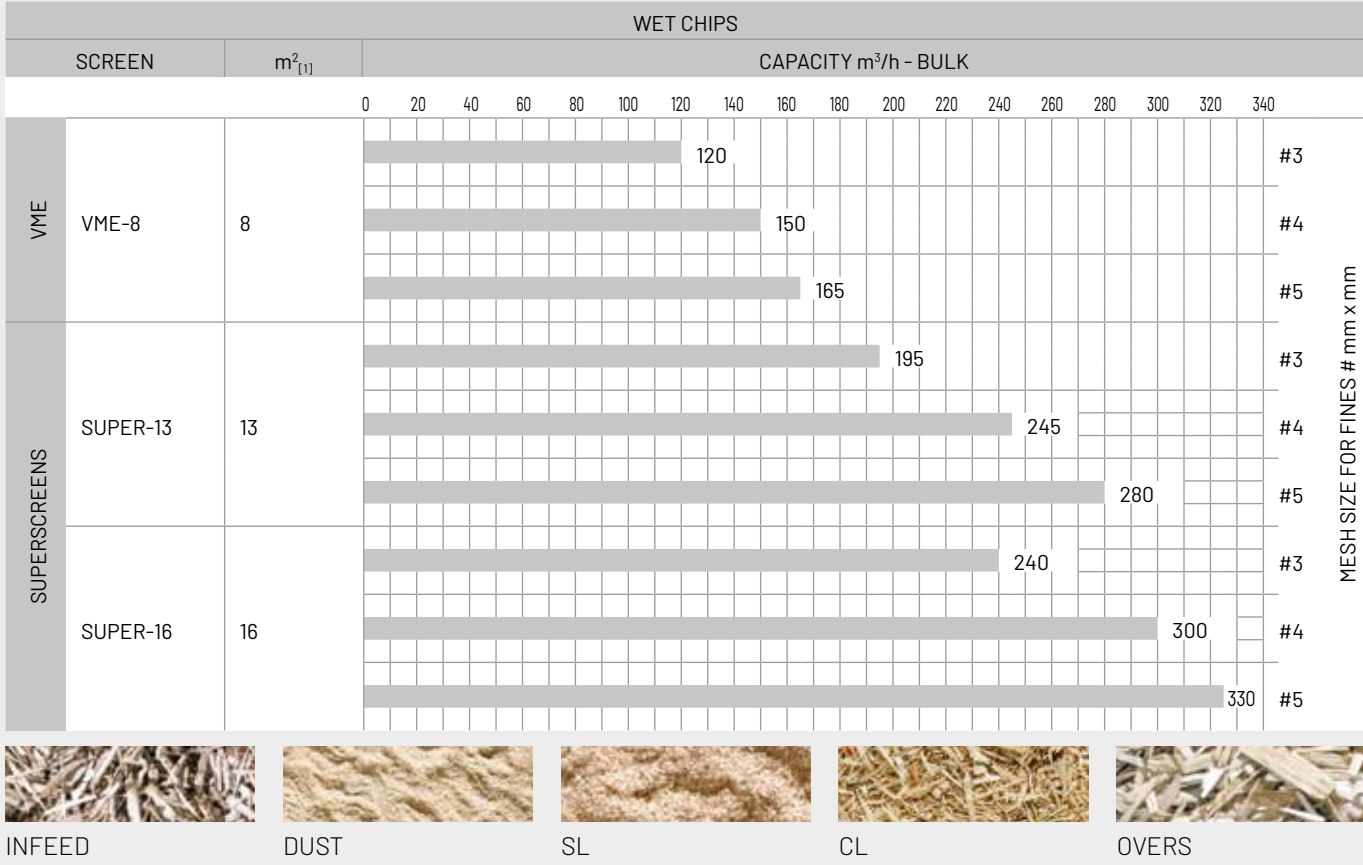

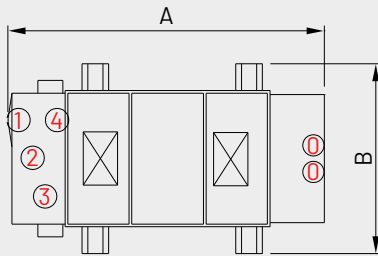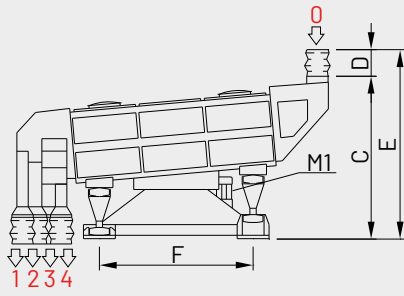


FOR DRY PARTICLES

1 Double Deck




2 Fractions  
VME-DP-1P-16-EJ-...

2 Double Decks



3 Fractions  
VME-DP-2P-16-EJ-...

3 Double Decks



4 Fractions  
VME-DP-3P-16-EJ-...

[1] AC: Auto-cleaning ball-bouncing system for screens available for all decks  
[2] A wide range of mesh sizes are available for any screening needs

O = FEEDING  
1...4 = FRACTIONS

M1 = SCREENING  
BOX MOVEMENT

**VME-16**

2-STAGE SCREENS - 16 m<sup>2</sup> EACH DOUBLE DECK

MODEL	OVERALL DIMENSIONS mm									INSTALLED POWER kW	WEIGHT APPROX. kg
	A	B	C	D	E	F	G	H	I	M1	
VME-DP-1P-16-EJ	5415	2760	2450	500	2950	2230	2180	2560	1250	5,5	6500
VME-DP-2P-16-EJ	5975	3570	2800	500	3300	2890	2780	2560	1250	7,5	10250
VME-DP-3P-16-EJ	5950	3570	3080	500	3580	2890	2780	2560	1250	7,5	11000