



RECTANGULAR EXTRACTORS





MOVING FLOOR

TECHNICAL FEATURES

• The extractor is carried out by means some strong bars moving on slides placed on the silo floor • The bars are connected with some strong V-section beams able to transport the material to the discharging point • Each bar is driven by an hydraulic cylinder • The continue translation of the V-section beams installed on the bars permit to carry out the discharging of the material • An hydraulic unit guarantees the coordination of the longitudinal excursion of the bars.

BENEFITS

• Wide range of extraction • Easy modularity of the machine • Possibility of metal structure or reinforced concrete • Installation also overground • Very low maintenance cost.

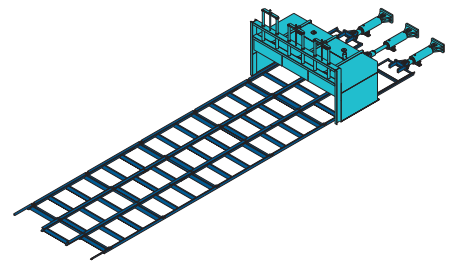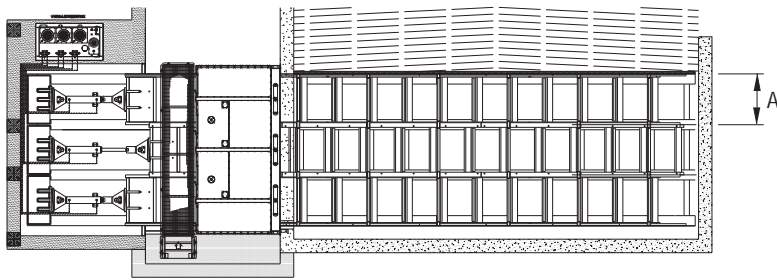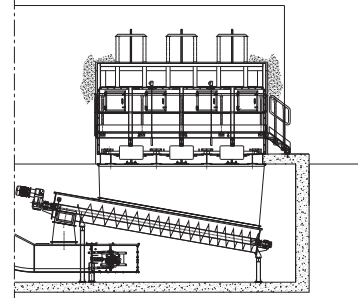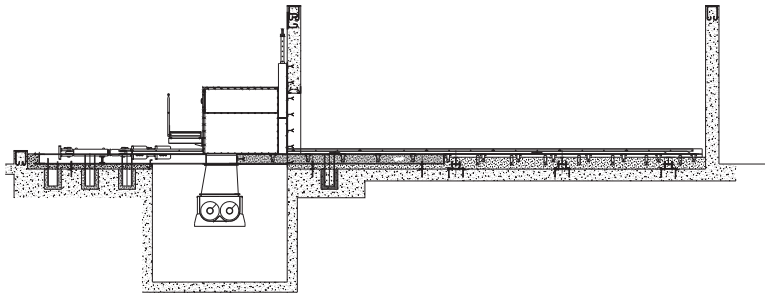

1 = FEEDING
2 = DISCHARGE

MODEL	OVERALL DIMENSIONS mm	EXTRACTION CAPACITY m ³ /h	DIMENSION	DRIVING POWER kW
	A			
MF./1500	1500	According to type of material and extraction capacity	According to storage capacity requested	Wide range available according to project customer needs